

Container Cargo is carried one row each port & starboard between frame 3 and frame 20


8ft high containers can be double stacked subject to V.C.G. calculations
 Non container cargo is carried forward of frame 20

Livestock is carried on two decks in demountable livestock deck/pens installed as required.



line is bottom edge of keel plate at vertical transom 34.2m forward

Load Summer Line mark certified 722mm aft of frame 16
 922mm below deck top edge ie 2100mm above baseline

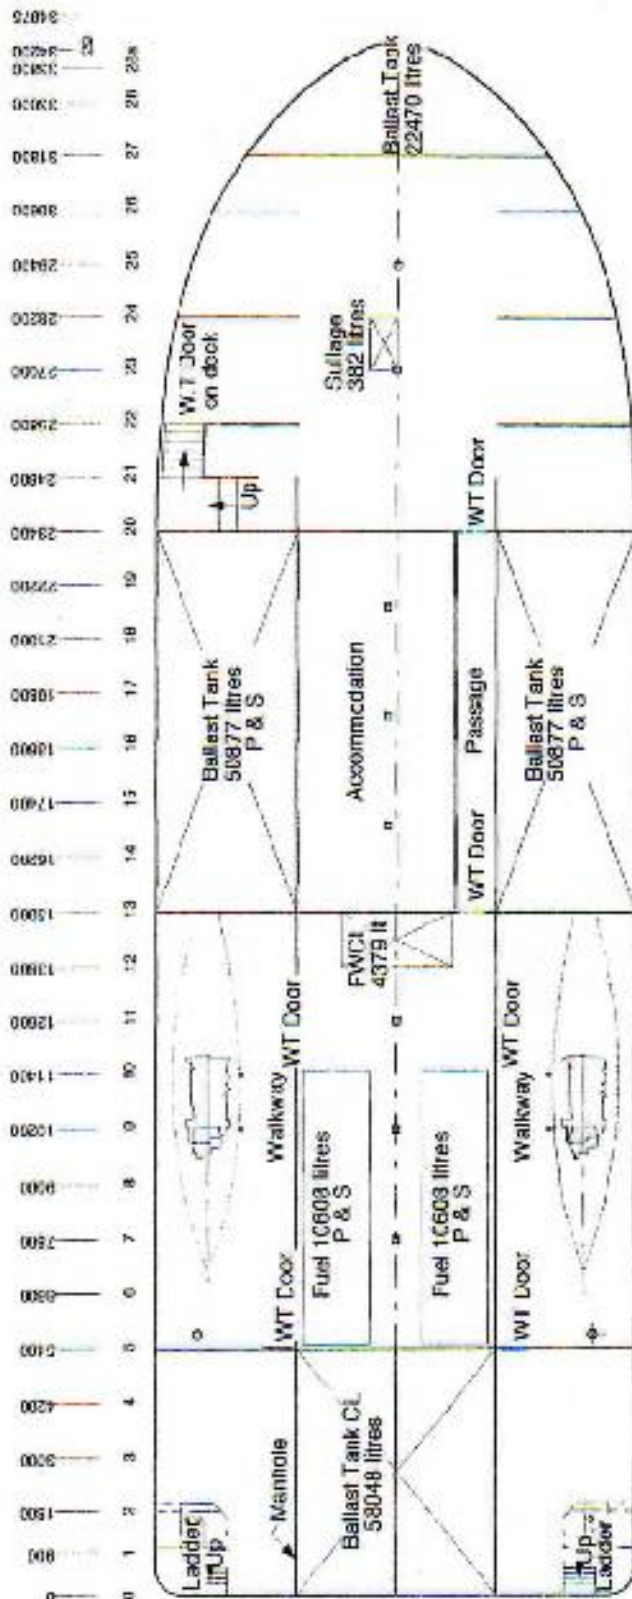

Southern Condor
 Datums Draft Marks & Tank Capacities

